




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 5 : H02M 7/48, H04M 19/00	A1	(11) International Publication Number: WO 93/19516 (43) International Publication Date: 30 September 1993 (30.09.93)
(21) International Application Number: PCT/US92/02456 (22) International Filing Date: 25 March 1992 (25.03.92) (71) Applicant: RAYNET CORPORATION [US/US]; 155 Constitution Drive, Menlo Park, CA 94025 (US). (72) Inventor: HURST, David, E. ; 2766 Camino Venvenadillo, San Ramon, CA 94583 (US). (74) Agent: KOVACH, Dennis, E.; Raynet Corporation, 155 Constitution Drive, Menlo Park, CA 94025 (US). (81) Designated States: AU, CA, JP, KR, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IT, LU, MC, NL, SE).		Published With international search report.

(54) Title: DC/DC/AC POWER SUPPLY

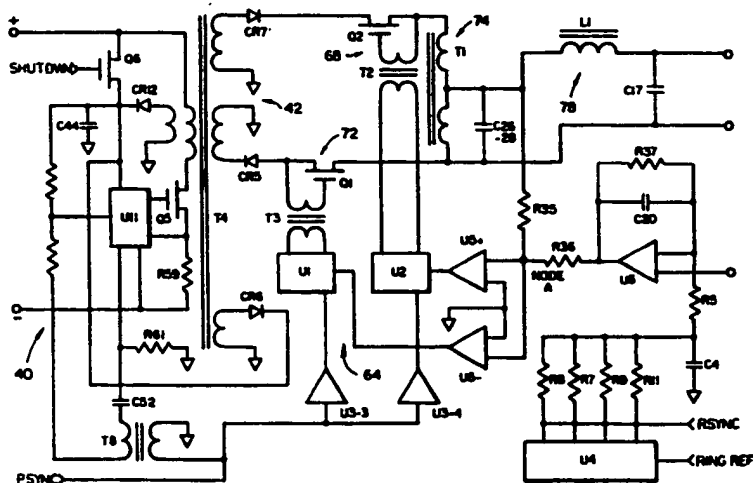

(57) Abstract

A DC to DC switch mode power supply for a service subscriber interface unit of a fiber optic network includes a source of DC primary power, a main DC to DC switched mode power supply connected to the source of DC primary power and including switching circuitry and rectifier circuitry for supplying DC operating power to the service subscriber interface unit including central office battery power to at least one subscriber loop connected thereto, and a ringing voltage DC to AC switched mode generator connected to the source of DC primary power and including switching circuitry and synchronous rectification circuitry for generating ringing voltage approximating a sine wave supplied as a reference to the synchronous rectification circuitry. A Johnson counter and resistor capacitor network is preferably employed to convert a reference ringing square wave into a sine wave.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FR	France	MR	Mauritania
AU	Australia	GA	Gabon	MW	Malawi
BB	Barbados	GB	United Kingdom	NL	Netherlands
BE	Belgium	GN	Guinea	NO	Norway
BF	Burkina Faso	GR	Greece	NZ	New Zealand
BG	Bulgaria	HU	Hungary	PL	Poland
BJ	Benin	IE	Ireland	PT	Portugal
BR	Brazil	IT	Italy	RO	Romania
CA	Canada	JP	Japan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SK	Slovak Republic
CI	Côte d'Ivoire	LJ	Liechtenstein	SN	Senegal
CM	Cameroon	LK	Sri Lanka	SU	Soviet Union
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	MC	Monaco	TG	Togo
DE	Germany	MG	Madagascar	UA	Ukraine
DK	Denmark	ML	Mali	US	United States of America
ES	Spain	MN	Mongolia	VN	Viet Nam
FI	Finland				

DC/DC/AC POWER SUPPLY

The present invention relates to electronic power conversion equipment. More particularly, the present invention relates to a DC to DC to AC power supply which has particular application and suitability to remote power supply including on-demand ring voltage generation for use at remotely located subscriber interface units ("SIU") within fiber optic networks.

10 Background of the Invention

Conventional telephone instruments include an incoming call annunciator: classically a bell, more recently a piezoelectric resonator. In a conventional telephone network, a wire pair extends from a telephone central office location to the service subscriber's premises. Central office battery voltage is typically applied to the wire pair to power the telephone service set, and an AC voltage, nominally 90 volts at 20 Hertz, is applied whenever it is appropriate to ring the telephone bell(s) of the service set(s) at the subscriber's premises, in order to signal an incoming call and induce a user to remove the handset from its cradle, known as an "off hook" condition. The standard telephone service set within the U.S. Bell System includes a bell call annunciator which is broadly resonant at 20 Hertz. In Europe and elsewhere, a frequency of 25 Hertz is commonly employed as the ringing frequency.

25 Ringing voltage is generated at a central office in a number of ways. A rotary generator or ringing machine consists of a single-speed motor (either AC or DC, depending upon the local power supply). The motor rotates one or more AC generators which generate the desired ringing frequencies and voltages. Magnetic generators operating from the AC power mains have been used to generate ringing signals. Such generators employ resistors, transformers and tuned circuits of inductors and capacitors in order to develop the desired ringing signal. Vibrating reed converters have also been employed to generate ringing voltage from the 48 volt central office battery supply. These converters

have included two magnetic coils, an armature and a reed assembly mounted on a frame, and have converted the 48 volts DC into a square wave of the desired frequency for ringing. A filter circuit has modified the square wave to a sine wave. A mechanical interrupter has been
5 employed to divide the ringing generator's signal into alternating ringing and silent periods. One implementation has been a motor for rotating a shaft carrying a number of cams which operate switch contacts that switch the ringing signal on and off. Electronic oscillators have also been employed to generate signals used for ringing. Such
10 circuits have been used in conjunction with private branch exchanges, etc. All of the foregoing approaches have been bulky and have required significant amounts of primary operating power.

Fiber optic networks are proliferating within telecommunications
15 systems. Fiber optic cables are now being extended to "curbside" or within about 100 feet or so of the subscriber's premises. In fiber optic based networks, it is not possible to send central office battery or ringing signals over the fiber optic cable, and these signals must be locally generated at the SIU and delivered to the customer in an
20 appearance functionally identical to the existing "wire plant" network capability. While small, switched mode DC to DC converters are known to be efficient in supplying power, a hitherto unsolved need has arisen for a highly compact, highly efficient DC to DC to AC power supply including an on-demand ringing voltage generator, e.g. for
25 inclusion within an SIU of a fiber optic network.

Summary of the Invention with Objects

A general object of the present invention is to generate and put
30 out a smooth sine wave at a selected frequency within a range of low frequencies and at high conversion efficiency and low cost in a manner which overcomes limitations and drawbacks of the prior art.

Another general object of the present invention is to provide a
35 power supply for a subscriber interface unit (SIU) of an optical fiber

network including an on-demand ringing voltage generation apparatus for generating a sine wave power signal in a manner which overcomes limitations and drawbacks of prior approaches.

5 A more specific object of the present invention is to provide a small, compact and highly efficient power supply for an SIU of a fiber optic network which includes a very compact and efficient DC to AC ringing voltage generator for generating and putting out a ringing
10 signal approximating a sine wave at sufficient power to operate multiple telephone instrument bells and annunciators simultaneously and with a highly efficient circuit contained in a small physical space.

 A further object of the present invention is to provide a switched mode DC to DC power supply which includes synchronous push-pull
15 rectification to generate an AC voltage mimicking a reference AC sinewave in a manner particularly suited for use as ringing voltage for multiple telephone instruments.

 One more object of the present invention is to provide a highly
20 efficient, externally controllable ringing voltage generator which may be turned on and off in accordance with logic control signals.

 Yet another object of the present invention is to provide a DC to DC to AC generator so designed that a range of operating frequencies
25 are directly obtained by adjusting the drive frequency without circuit modification, so that e.g. 20 Hertz ringing signals may be generated for SIUs in North America, while 25 Hertz ringing signals may be generated for SIUs in Europe and in other areas of the world without circuit modification or adjustment.

30 Still another object of the present invention is to provide a power supply for a subscriber interface unit (SIU) of a fiber optic network which is small and efficient in size, requiring neither physically large inductors nor physically large capacitors.

35

Yet one more object of the present invention is to make use of readily available, low cost elements, particularly integrated circuit pulse width modulator integrated circuits to realize a push pull synchronous dual quadrant rectifier circuit within a switched power supply DC to
5 AC generator.

Still one more object of the present invention is to employ a switched DC to DC converter and synchronous push pull rectifier to generate an AC power signal closely approximating a sine wave with
10 minimal quantization errors or discontinuities (glitches).

Still another object of the invention is to provide a ring sync signal for the proper timing of the application to or the removal from the subscribers time of the ringing voltage. Since various voltages on
15 the sync wave are presented by counter states either zero crossing or points before or after zero crossing are available for use in timing ring relays or other switching circuitry which applies the ringing voltage to the line. This eliminates the need for analog circuitry to accomplish this function.

20

Yet another object of the present invention is to provide a switched mode DC to DC power supply for supplying common battery and ringing voltage to at least one service subscriber of an optical fiber network, wherein the ringing voltage closely follows a sine wave and is
25 modulated upon a DC battery voltage applied over a wire pair leading to the service subscriber.

Still one more object of the present invention is to provide a switched mode power supply for supplying power to a subscriber
30 interface unit, including low frequency AC ringing voltage, in a manner which is independent of and isolated from a primary power source which supplies primary power to the power supply.

In accordance with one facet of the present invention, a DC to DC
35 to AC power converter is provided for converting a DC voltage supply

to an AC power signal approximating a sine wave at a first frequency F1 via a switched mode DC to DC power supply operating at a second and much higher frequency F2. The DC to DC to AC power converter includes

5

an input for receiving the DC voltage supply,

a power switching circuit for switching the DC voltage supply at the second frequency F2 and for applying the switched DC voltage
10 supply to primary windings of one or more transformers, the transformers having at least two secondary windings including a push winding and a pull winding,

a push loop including the push winding, a push rectifier and a
15 push switch operating at the F2 frequency, a pull loop including the pull winding,

a pull rectifier and a pull switch operating at the F2 frequency,

20 a summing junction for summing power delivered from both the push loop and the pull loop and for providing an output,

a sine wave reference signal providing circuit for providing a nominal sine wave at the F1 frequency including a positive half cycle
25 and a negative half cycle,

a push driver controlled by the positive half cycle for controlling the push switch at the F2 frequency substantially in accordance with the positive half cycle, and
30

a pull driver controlled by the negative half cycle for controlling the pull switch at the F2 frequency substantially in accordance with the negative half cycle.

In one aspect of this facet of the invention the DC to DC to AC power converter further includes a synchronizing circuit for synchronizing operation of the power switching circuit, the push driver and the pull driver with reference to the higher F2 frequency.

5

In another aspect of this facet of the invention the DC to DC to AC power converter establishes the frequency F1 as being in a range from 10 to 50 Hertz, and operates with the frequency F2 as being in a range from 50,000 Hertz to 1,000,000 Hertz

10

In a further aspect of this facet of the invention the DC to DC to AC power converter is configured to operate in a flyback mode wherein energy stored in the transformer when the power switching means is off is delivered via the push loop and the pull loop, and further comprises a storage capacitor connected at the summing junction.

15

In one more aspect of this facet of the invention the DC to DC to AC power converter is configured to operate in a forward mode and further comprises a power inductor for energy storage connected at the summing junction.

20

In a still further aspect of this facet of the present invention the DC to DC to AC power converter further includes logic circuitry connected to control operation of said power switching circuit in accordance with an externally supplied logic control signal.

25

In one more aspect of this facet of the invention the power switching circuit includes a first pulse width modulator, the push driver includes a second pulse width modulator, and the pull driver includes a third pulse width modulator, the first, second and third pulse width modulators being clocked by said synchronizing circuit at the F2 frequency.

30

In still another aspect of this facet of the invention the sine wave reference signal providing circuit comprises:

35

a reference ringing signal input for receiving a digital reference ringing signal having a frequency which is an integral multiple of the frequency F_L ,

5

a counter for counting at the digital reference ringing signal and having an output network for generating a successive approximation of a sine wave at the frequency F_L , and

10

an integrator connected to the counter for integrating the successive approximation into the nominal sine wave.

15

In a related aspect, the counter is a Johnson configuration counter configured as a modulo- 10 counter having four low order inverting outputs connected to resistors extending to a common node connecting to an input of the integrator, and the integrator comprises an operational amplifier including a feedback network providing a low pass filter.

20

In a further related aspect, a ring sync signal is connected to each of the resistors connected to the modulo- 10 outputs for the proper timing of the application to or the removal from the subscribers time of the ringing voltage.

25

In accordance with another facet of the present invention, a DC to DC switch mode power supply is provided for for a service subscriber interface unit of a fiber optic network. The power supply includes:

30

a source of DC primary power,

a main DC to DC switched mode power supply connected to the source of DC primary power and including electronic power switching circuitry, such as enhancement mode field effect transistors and rectifiers for supplying operating power to the service subscriber

interface unit including central office battery power to at least one subscriber loop connected thereto, and

5 a ringing voltage DC to AC switched mode generator connected to the source of DC primary power and including power switching circuitry and synchronous rectification circuitry for generating ringing voltage approximating a sine wave supplied as a reference to the synchronous rectification circuitry.

10 As an aspect of this facet of the invention the ringing voltage DC to AC switched mode generator operates on an as-needed basis under control of the service subscriber interface unit.

15 As another aspect of this facet of the invention the ringing voltage DC to AC switched mode generator operates in a self-oscillation mode when the source of DC primary power is first supplied to the DC to DC switch mode power supply so as to generate power for starting said main DC to DC switched mode power supply.

20 As a still further aspect of this facet of the invention after the service subscriber interface unit is started, it generates 3 power supply sync reference signal PSYNC which synchronizes operation of the main DC to DC switched mode power supply and the DC to AC switched mode generator and also supplies a reference waveform which is used to
25 generate the ringing voltage sinewave.

These and other objects, advantages, aspects and features of the present invention will be more fully understood and appreciated upon consideration of the following detailed description of preferred
30 embodiments, presented in conjunction with the accompanying drawings.

Brief Description of the Drawings

Fig. 1 is a block diagram of a power supply incorporating the principles of the present invention, e. g. for powering a subscriber interface unit.

Fig. 2 is a simplified schematic circuit diagram of a first preferred embodiment of a DC to DC to AC ring generator circuit within the Fig. 1 power supply, following a flyback configuration in accordance with principles of the present invention.

Fig. 3 is a simplified schematic circuit diagram of a second preferred embodiment of a DC to DC to AC ring generator circuit implementing a forward mode configuration with separate power transformers and an energy storage choke in accordance with principles of the present invention.

Fig. 4 is a simplified schematic circuit diagram of a third preferred embodiment of a DC to DC to AC ring generator circuit implementing a forward mode configuration with a single power transformer and energy storage choke in accordance with principles of the present invention.

Figs. 5A and 5B are a detailed circuit schematic of the Fig. 1 DC to DC switch mode power supply in accordance with principles of the present invention, illustrating in detail an implementation of the Fig. 2 ring generator embodiment.

Detailed Description of the Preferred Embodiment

An optical fiber network which extends to the vicinity of the service subscriber's premises requires an optical to electrical signal converter, known as a subscriber interface unit (SIU). It is the function of the SIU to convert telecommunications signalling and data signals into analog control and intelligence signals, most typically voice, fax or

modern signals and deliver these analog electrical signals to the subscriber over e.g. a twisted wire pair. Ideally, the SIU is about 100 feet or so from the subscriber's premises, and is therefore necessarily a compact, highly efficient and rugged unit which may be contained in a small weather shed or protection shelter subject to the extremes of the ambient exterior environment, or which may be mounted within an equipment room at the subscriber's premises. The SIU must be very efficient, as the primary power supply available to it may be limited, and it must be very robust, with an expected service life free from maintenance of many years.

With reference to Fig. 1, a power supply 10 for an SIU (not shown) is depicted in functional and structural overview. Circuit details for one preferred implementation of this power supply 10 are provided in the circuit schematics of Figs. 5A and 5B. The power supply 10, incorporating principles of the present invention, efficiently converts primary DC voltage, either 48 volts or 135 volts, into a plurality of voltages, including ringing voltage, and supplies these voltages to the SIU, and through the SIU to the service subscribers via twisted pairs. The power supply 10 includes an on-demand ringing voltage generator in accordance with principles of the present invention. The ringing voltage generator synthesizes a sine wave at a sub-multiple of a ringing voltage digital driving signal, and puts out AC ringing voltage at a power level sufficient to operate up to twenty telephone bells or other annunciators simultaneously. Approximate ringing power output is 15 watts, continuous duty cycle.

Again referring to Fig. 1, a power input 12 leads from a DC power source, either 48 volts or 135 volts DC. In the case of power being supplied from the AC power mains, an external rectifier and capacitor provide the nominal 135 volts DC. The incoming DC voltage passes through an overvoltage surge protector array 14 which may comprise shunt and series connected metal oxide varistor (MOV) elements as conventionally employed for surge protection. Surge protected power on an internal bus 15 extends to a switch mode main

power supply element 16 which includes a +24 volt DC regulator 18 and +24VDC output 20, a -32 volt DC regulator 22 and -32VDC output 24, a +5 volt DC regulator 26 and +5VDC output 28, a -5 volt DC regulator 30 and -5VDC output 32 and an undervoltage detector circuit 34 which detects an undervoltage condition at the main power supply 16 and provides an alarm signal to the SIU over an output line 36. In accordance with good engineering practices, a +5 volts DC analog supply bus is kept separate from a +5 volts DC digital supply bus.

10 The internal power bus 15 also leads to a power shutdown switch 38 which generates and supplies an enable power signal via a line 39 to a ringer power driver circuit 40. The ringer power driver circuit includes a pulse width modulating element which switches the DC power into alternating drive current and supplies the drive current to e.g. an
15 enhancement mode power FET switch in series with a primary of a transformer within a ringer power transformer and switch block 42. Output from the ringer power transformer and switch block 42 is taken through a soft start block 44 to control operation of a DC/DC pulse
20 width modulator time base generator block 46 which supplies the basic timing signals to all of the elements of the power supply 10. The time base generator block 46 is supplied with a reference sync signal PSYNC from the SIU over a line 48. The PSYNC reference signal is most preferably a logic signal approximating a square wave, and has a frequency of e.g. 120 KHz to 750 KHz, and most preferably about 128
25 KHz. The time base generator block 46 applies drive to a DC/DC drive sensing circuit 50 which senses drive current applied to the main DC/DC power transformer and switch 16. PSYNC from the time base generator 46 is also supplied to the ringer power driver circuit 40.

30 A filter 52 filters and puts out +5VDC digital on a line 54 to a power shutdown circuit 56 and to other digital circuitry within the power supply 10. Another input 58 to the power shutdown circuit 56 carries a ring enable logic signal from the SIU. This signal, as processed by the power shutdown circuit 56, causes the power shutdown

switch 38 to be operated externally by the SIU, so that ringer voltage is generated only when needed, thereby conserving power.

The DC/DC/AC ringer power converter receives a ring
5 frequency signal over a line 62 from the SIU, typically 200 Hz for
North America, and 250Hz for Europe and other countries employing a
25 Hz ringing signal frequency. The ring frequency signal on the line
62 (which is a digital logic signal or square wave) is applied to a
reference sine wave generator circuit 60 which generates a reference
10 sine wave e.g. at one tenth the frequency of the ring frequency signal, in
a manner which will be explained in greater detail hereinafter. The sine
wave generator circuit 60 also generates a ring sync signal RSYNC.
RYCNC provides a ring sync signal for the proper timing of the
application to or the removal from a subscriber's time of the ringing
15 voltage. Since various voltages on the sync wave are presented by
counter states either zero crossing or points before or after zero
crossing are available for use in timing ring relays or other switching
circuitry which applies the ringing voltage to the line. This eliminates
the need for analog circuitry to accomplish this function.

20

The reference sine wave is also applied as a reference signal input
to a dual quadrant push pull ring converter and driver 64 along with
sync from the time base generator 46 and an enable signal from the
power shutdown circuit 56. The push pull ring converter and driver 64
25 generates a two-quadrant push phase drive signal, and a two-quadrant
pull phase drive signal and applies them to control push and pull two
quadrant synchronous rectifiers. The plus control signal (e.g. "push") is
applied over a line 66 to a push phase synchronous rectifier 68, while
the minus control signal (e.g. pull phase) is applied over a line 70 to
30 control a pull phase synchronous rectifier 72. Outputs from the push
phase synchronous rectifier 68 and pull phase synchronous rectifier 72
are combined in a power combining and limiting circuit 74. A ringer
loop feedback signal is also supplied from the output of the power
limiting circuit 74 to the push pull converter and driver circuit 64 over
35 a feedback path 76. As will be explained hereinafter in greater detail,

the low frequency reference sinewave and the feedback signal are summed to zero and any resultant error signal controls which synchronous rectifier will be operating at any particular time.

5 A filter 78 filters the output of the limit circuit 74 and supplies ringing current at an output 80. The ringing current is available selectively on demand from the SIU. The ringing voltage is approximately 200 Volts peak to peak, is modulated upon the -32 volt DC "central office" battery voltage put out at the output 24 by the main
10 power supply, and thus has peak to peak excursions relative to earth ground return of +68 volts and -132 volts.

The Fig. 1 ringer circuit, comprising the elements 42, 64, 69, 72, 74 and 76, may be configured in either a flyback mode, as shown in
15 Fig. 2 and 5A-5B, or it may be configured in a forward mode, as shown in Figs. 3 and 4, for example.

Turning now to Fig. 2, a simplified schematic of the ringing voltage generator circuit is provided. Components and elements have
20 been given reference letters and numerals in Fig. 2 which generally correspond to the reference letters and numerals applied to the same elements in the detailed circuit schematic of Figs. 5A and 5B.

The driver circuit 40 includes a pulse width modulator U11
25 which drives an enhancement mode field effect power transistor as at a switching rate established by the PSYNC square wave driving signal, nominally 128 KHz. Current flowing through the primary winding of the ringing transformer T4 is sensed through the series resistor R59 and fed back to control operation of the PWM U11. The pulse transformer
30 T8 and blocking capacitor C52 enable the PSYNC driving signal to be applied to operate the PWM U11. The function of the circuit 40 is to dump energy into the ringer power transformer T4 by causing a magnetic field to build up when the FET switch Q5 is closed. A feedback winding of the transformer T4 enables the switch Q5 to open
35 and close in a free running mode when power is first applied, and

before the SIU is capable of generating the PSYNC reference signal. This enables the circuit 40 to generate an initial or starting voltage supplied to the V+ bus which enables the other circuitry of the power supply 10 to begin to function in order to generate the power supplies
5 required for operation of the SIU.

After the FET switch Q5 is opened, the field collapses and power from the field is drawn through one or the other of the synchronous rectifiers 68 or 72. The positive quadrants synchronous rectifier 68
10 includes a series loop of a T4 secondary winding, half wave diode rectifier CR7, and an enhancement mode power FET Q2 driven by a pulse transformer T2 operating in the linear mode. Direct current rectified by the diode CR7 is selectively passed by the FET Q2 and delivered to one winding of a current sense transformer T1. The pulse
15 transformer T2 is driven by a pulse width modulator U2.

The negative quadrants synchronous rectifier 72 similarly includes a series loop of another T4 secondary winding, a half wave rectifier diode CR5, and an enhancement mode power FET Q1 driven
20 by another pulse transformer T3. The pulse transformer T3 is in turn driven by a pulse width modulator circuit U1.

An analog comparator circuit comprising U5+ and U5- generates and puts out control currents to the PWMs U1 and U2 in accordance
25 with an error signal at a summing junction labelled NODE A. The error signal is the difference between the reference low frequency sine wave supplied via a resistor R36 and a feedback signal supplied through a feedback resistor R35. Depending upon the sign of the difference, the comparator U5 selects the appropriate PWM, either PWM U1 or PWM
30 U2 to cause a signal to be passed by the respective FET switch, either Q1 or Q2, so that the voltage at the output is forced to follow the reference waveform fed into NODE A. The ratio of the resistors R35 and R36 establishes the voltage ratio between the reference voltage and the output voltage, and the respective resistances scale the error signal to be
35 within the dynamic range of the comparator U5. In operation, if the

error signal tends to become positive, this will cause the positive voltage quadrants loop comprising CR7 and Q2 to turn off, and the negative quadrants loop comprising CR5 and Q1 to turn on. The reverse situation also obtains. The width of discrete pulses put out by each loop is fixed by the respective PWM U1 or U2, and has a maximum duration fixed by the PSYNC clock period. Thus, the control loop, starting at NODE A turns on either the positive quadrants loop switch Q2 or the negative quadrants loop switch Q1 for as long as necessary to force NODE A to remain at zero volts.

10

While the reference sinewave generator 60 may follow a number of forms, it most preferably includes a type CD 4018 counter circuit configured as a Johnson counter in a decade arrangement. The modulo-10 Johnson counter architecture is a known configuration which is implemented with a shift register, and puts out essentially a Gray code in which adjacent counts result only in a single bit change. The following table illustrates the output pattern put out by the counter U4. This pattern is used selectively to add and subtract resistances of shunt resistors R8, R7, R9 and R11 in parallel:

20

TABLE 1:

	0 0 0 0 0
	0 0 0 0 1
25	0 0 0 1 1
	0 0 1 1 1
	0 1 1 1 1
	1 1 1 1 1
	0 1 1 1 1
30	0 0 1 1 1
	0 0 0 1 1
	0 0 0 0 1

Resistors R8 and R11 are e.g. 22 Kilohms, while resistors R7 and R9 are 33 Kilohms. A resistor ratio of 1/1.3 has been found to result in an output waveform from the modulo- 10 Johnson counter U4 which closely reproduces a sinewave. The integration capacitor C4 causes the

35

resultant waveform put out by the counter U4 to follow a locus approximating a sinewave over four quadrants. An operational amplifier U6 is configured as an integrator, and it smooths the resultant sine wave and delivers it to NODE A via the resistor R36. RSYNC is
5 connected to each of R8, R7, R9, and R11 to generate an appropriate ring sync.

A negative feedback network connected across the operational amplifier U6 and comprising a 0.1 microfarad capacitor C20 and a 50
10 Kilohm resistor R37 establishes a low pass filter which passes signals up to about 50 Hz, but which eliminates high frequencies, including any high frequency aliases or spurs otherwise coming out of the Johnson counter U4. Thus, it will be appreciated that the square wave ringing reference signal entering the Johnson counter U4 is ten times the
15 resultant sine wave, and can range from 100Hz to 500 Hz, resulting in an AC sinewave output of the ringing generator 60 of 10 Hz to 50 Hz. Differing ringing frequencies may thereby be readily generated and put out without requiring any modification or "tuning" of the ringing voltage generator circuit 60. In North America the nominal ringing
20 frequency is 20 Hz, and the reference square wave is 200 Hz, while in Europe and elsewhere in the world, for a 25 Hz ringing voltage, a 250 Hz reference square wave is directly applied at the ringing generator input.

25 As noted in the preferred embodiment depicted in Fig 2, the ringing voltage transformer T4 is operated in a flyback mode wherein during the field development half cycle in which the driving circuit 40 is on, the synchronous rectifier loops 68 and 72 are biased off, and only come to life after the power driver circuit 40 has shut down. In the
30 flyback mode, a filter includes an input capacitance C26, C27, and C28 followed by a relatively small smoothing choke L1 and an output capacitance C17.

A forward mode configuration is illustrated in Fig. 3 wherein the
35 positive quadrants loop 68' includes a driving circuit 40A, and the

negative quadrants loop 72' includes a driving circuit 40B. The power transformers T4-A and T4-B may be made much smaller than the flyback mode transformer T4, and the drivers 40A and 40B and associated transformers T4-A and T4-B are connected so that the selected one of the diodes CR7 and CR5 will conduct on the forward or field building half cycle. In the forward mode, energy storage is provided by a storage inductor LS which feeds the low pass filter 78. A forward mode configuration using a single transformer T4" and a single driving circuit 40" is shown in Fig. 4.

10

When power is first applied, the power supply 10 and the SIU have not yet come to life. Incoming current on the internal bus 15 passes through a FET switch Q6, and with no signal to shut down this switch, it conducts and passes the current to charge up a large value capacitor C44. When the voltage across the capacitor C44 reaches a level fixed by a zener diode VR7, the ringer driver circuit 40 comes to life and causes a field to build in the ringer transformer T4. The feedback winding and diode CR 12 provide for free oscillation of the circuit 40 during this initial phase. A secondary winding and diode CR6 then provide a starting voltage V+ which is applied to start operation of a pulse width modulator U7 which in turn starts the main power supply comprising a drive transformer T5, driver FET switch Q7 and primary of main transformer T7.

25

The main DC to DC converter now turns on, and generates the voltages noted in Fig. 1 and applies those voltages throughout the SIU. When +5 volts DC digital comes up, an optoisolator U9 shuts off operation of the ringer generator driver 40 by turning off the FET switch Q6. At the same time, the SIU is receiving power, and begins to generate both the PSYNC and RINGREF square waves which are supplied back to the power supply 10. During operation, current demands are monitored in both the main DC to DC converter and within the ringing generator driver, and output power is controlled by the pulse width modulators U7 and U1. As is well understood in fiber

30

optic technology, during periods of slack traffic, the laser at the SIU is dimmed, thereby extending the service life thereof.

5 When a need arises for ringing voltage, logic circuits U3-1, U3-3
and U3-4 cause the drivers U1 and U2 to come back to life and also turn
on the switch Q6. The switch Q6 applies power to the ringer driver 40,
and ringing voltage is generated and put out. The duration of the
ringing voltage on interval is controlled by this logic circuitry under the
direction of the SIU. Thus, the ringing power supply is turned on and
10 off during each ring interval of a ringing sequence, further conserving
power.

15 To those skilled in the art to which the present invention pertains
many widely differing embodiments will be suggested by the foregoing
without departing from the spirit and scope of the present invention.
The descriptions and disclosures herein are intended solely for purposes
of illustration and should not be construed as limiting the scope of the
present invention which is more particularly pointed out by the
following claims.

1 What is claimed is:

2

3 1. A DC to DC switch mode power supply for a service subscriber
4 interface unit of a fiber optic network comprising:

5

6 a source of DC primary power,

7

8 main DC to DC switched mode power supply means connected to
9 the source of DC primary power and including switching means
10 and rectifier means for supplying operating power to the service
11 subscriber interface unit including central office battery power to
12 at least one subscriber loop connected thereto,

13

14 ringing voltage DC to AC switched mode generator means
15 connected to the source of DC primary power and including
16 switching means and synchronous rectification means for
17 generating ringing voltage approximating a sine wave supplied as
18 a reference to the synchronous rectification means.

19

1 2. The DC to DC switch mode power supply set forth in claim 1
2 wherein the ringing voltage DC to AC switched mode generator means
3 operates on an as-needed basis under control of the service subscriber
4 interface unit.

5

1 3. The DC to DC switch mode power supply set forth in claim 2
2 wherein the ringing voltage DC to AC switched mode generator means
3 operates when said source of DC primary power is first supplied to the
4 DC to DC switch mode power supply so as to generate power for
5 starting said main DC to DC switched mode power supply means.

6

1 4. The DC to DC switch mode power supply set forth in claim 1
2 wherein the ringing voltage DC to AC switched mode generator means
3 initially operates in a free running mode when said source of DC
4 primary power is first supplied to the DC to DC switch mode power

5 supply, and generates initial operating power for starting said service
6 subscriber interface unit, and wherein after said service subscriber
7 interface unit is started it generates a power supply sync reference
8 signal PSYNC which synchronizes operation of the main DC to DC
9 switched mode power supply and the DC to AC switched mode
10 generator means.

11

1 5. The DC to DC switch mode power supply set forth in claim 1
2 wherein the ringing voltage DC to AC switched mode generator means
3 comprises:

4

5 power switching means for switching primary power supplied by
6 said source at a predetermined switching frequency F2 and for
7 applying the switched primary power to primary winding means
8 of transformer means,

9

10 said transformer means having at least a positive quadrants
11 secondary winding means and a negative quadrants secondary
12 winding means,

13

14 positive quadrants loop means including said positive quadrants
15 secondary winding means, positive voltage rectifier means and
16 positive voltage switch means,

17

18 negative quadrants loop means including said negative quadrants
19 secondary winding means, negative voltage rectifier means and
20 negative voltage switch means,

21

22 summing junction means for summing power delivered from both
23 the positive quadrants loop means and the negative quadrants loop
24 means and providing a feedback signal,

25

26 sine wave reference signal providing means for providing a
27 nominal sine wave reference signal at a low ringing frequency F1,

28

29 positive quadrants driver means for controlling said positive
30 voltage switch means,

31

32 negative quadrants driver means for controlling said negative
33 voltage switch means, and

34

35 comparator means for comparing the sinewave reference signal
36 and the feedback signal and for selectively controlling positive
37 quadrants driver means and negative quadrants driver means.

38

1 6. A DC to DC to AC power converter for converting a DC voltage
2 supply to an AC voltage approximating a sine wave at a first frequency
3 F1 via a switched mode DC to DC power supply operating at a second
4 and higher frequency F2, comprising:

5

6 an input for receiving the DC voltage supply,

7

8 power switching means for switching the DC voltage supply at the
9 second frequency F2 and for applying the switched DC voltage
10 supply to primary winding means of transformer means,

11

12 said transformer means having at least a push secondary winding
13 means, and a pull secondary winding means,

14

15 push loop means including the push winding means, a push
16 rectifier means and a push switch means operating at the second
17 frequency F2,

18

19 pull loop means including the pull winding means, a pull rectifier
20 means and a pull switch means operating at the second frequency
21 F2,

22

23 summing means for summing power delivered from both the
24 push loop means and the pull loop means and for providing an
25 output,

26

27 sine wave reference signal means for providing a nominal sine
28 wave at the F1 frequency including an F1 positive half cycle and
29 an F1 negative half cycle,

30

31 push driver means controlled by the positive half cycle for
32 controlling the push switch means at the second frequency F2
33 substantially in accordance with the F1 positive half cycle, and

34

35 pull driver means controlled by the negative half cycle for
36 controlling the pull switch means at the second frequency F2
37 substantially in accordance with the F1 negative half cycle.

38

1 7. The DC to DC to AC power converter set forth in claim 6 further
2 comprising synchronizing means for phase synchronizing operation of
3 the power switching means, the push driver means and the pull driver
4 means at the second frequency F2.

5

1 8. The DC to DC to AC power converter set forth in claim 6 being
2 configured to operate in a flyback mode wherein energy is stored in the
3 transformer means when the power switching means is off and is
4 delivered via the push loop and the pull loop, and further comprising
5 storage capacitor means connected at the summing means.

6

1 9. The DC to DC to AC power converter set forth in claim 6
2 configured to operate in a forward mode and further comprising power
3 inductor means for storing energy connected at the summing mean, and
4 further comprising logic circuit means connected to control operation
5 of said power switching means in accordance with an externally
6 supplied logic control signal.

7

1 10. The DC to DC to AC power converter set forth in claim 7
2 wherein said power switching means includes first pulse width
3 modulator means, the push driver means includes second pulse width
4 modulator means, and the pull driver means includes third pulse width

5 modulator means, said first, second and third pulse width modulator
6 means being clocked by said synchronizing means at the second
7 frequency F2.

8
1 11. The DC to DC to AC power converter set forth in claim 6
2 wherein said sine wave reference signal means comprises:

3
4 a reference ringing signal input for receiving a reference ringing
5 signal having a frequency an integral multiple of the frequency
6 F1,

7
8 counter means for counting at the reference ringing signal
9 frequency and having an output network means for generating a
10 successive approximation of a sine wave at the frequency F1,

11
12 integrator means connected to the counter means for integrating
13 the successive approximation into the nominal sine wave,

14
15 wherein the counter means comprises Johnson counter means and
16 the integrator means includes an operational amplifier means
17 including a feedback network comprising a low pass filter, the
18 reference ringing signal is ten times F1 and wherein the Johnson
19 counter is configured as a modulo- 10 counter having four low
20 order inverting outputs connected to resistors extending to a
21 common node connecting to an input of the integrator means, the
22 transformer means comprises a single transformer.

23
1 12. The DC to DC to AC power converter set forth in claim 9
2 wherein the transformer means comprises a push loop transformer and
3 a pull loop transformer, and wherein the power switch means comprises
4 a push loop power switch connected to a primary winding of the push
5 loop transformer, and a pull loop power switch means connected to a
6 primary winding of the pull loop transformer.

7

1/10

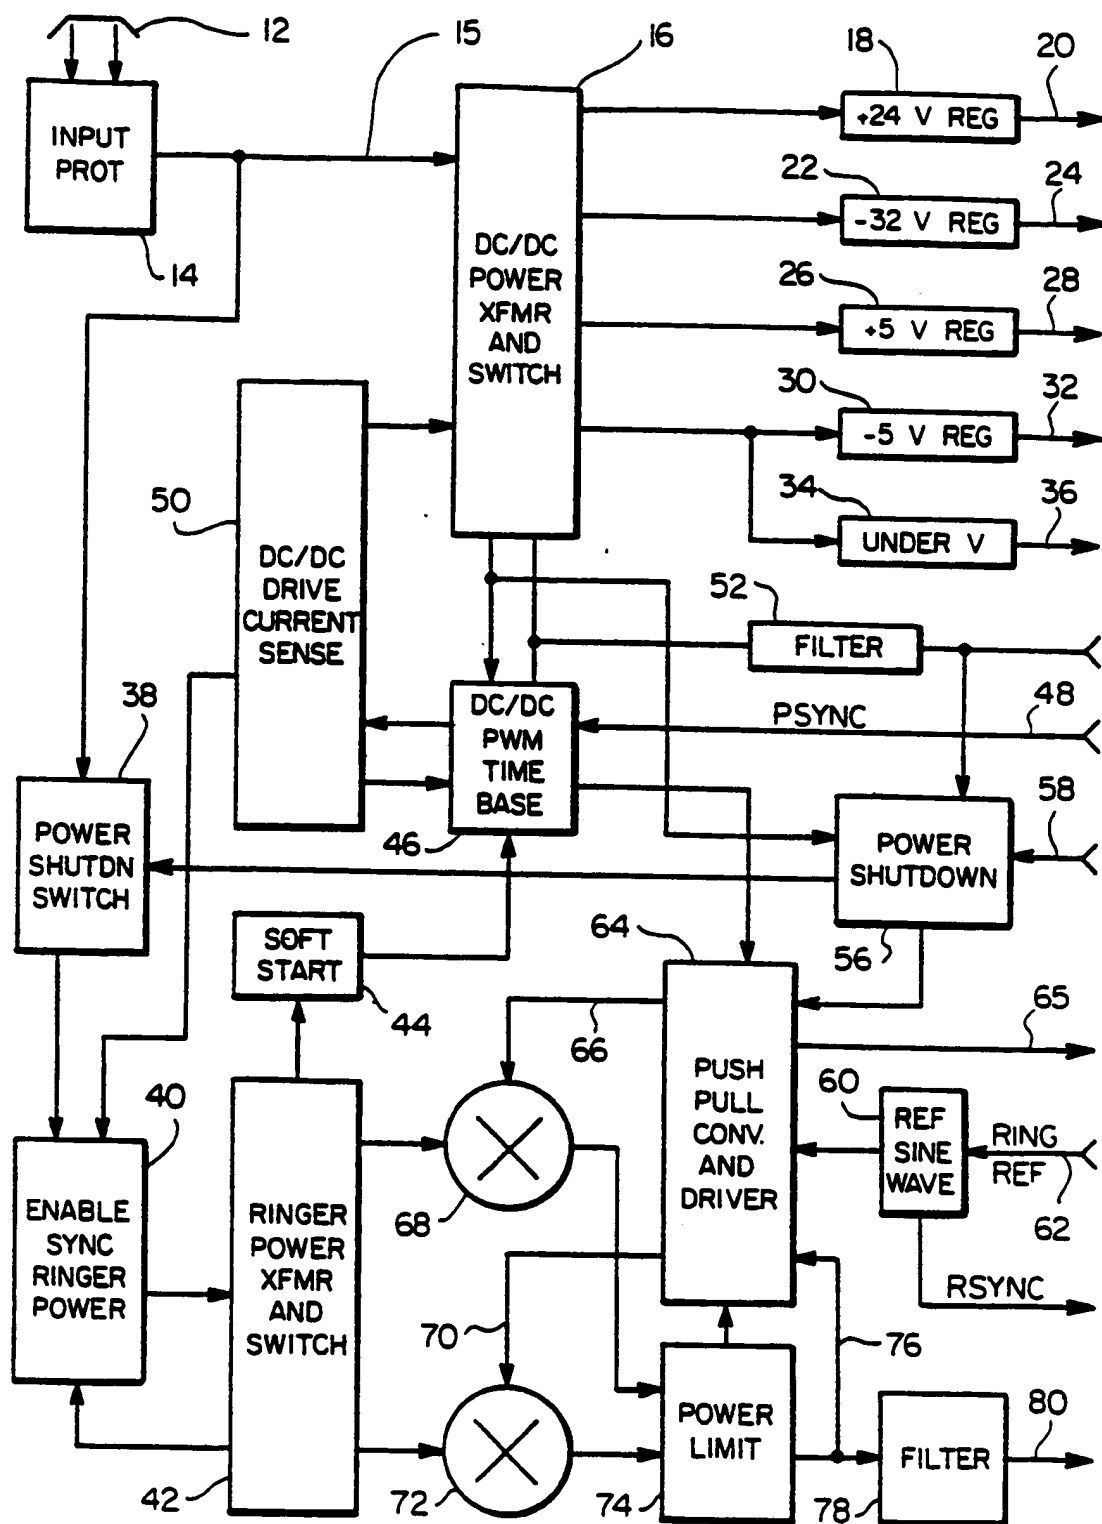


FIG 1

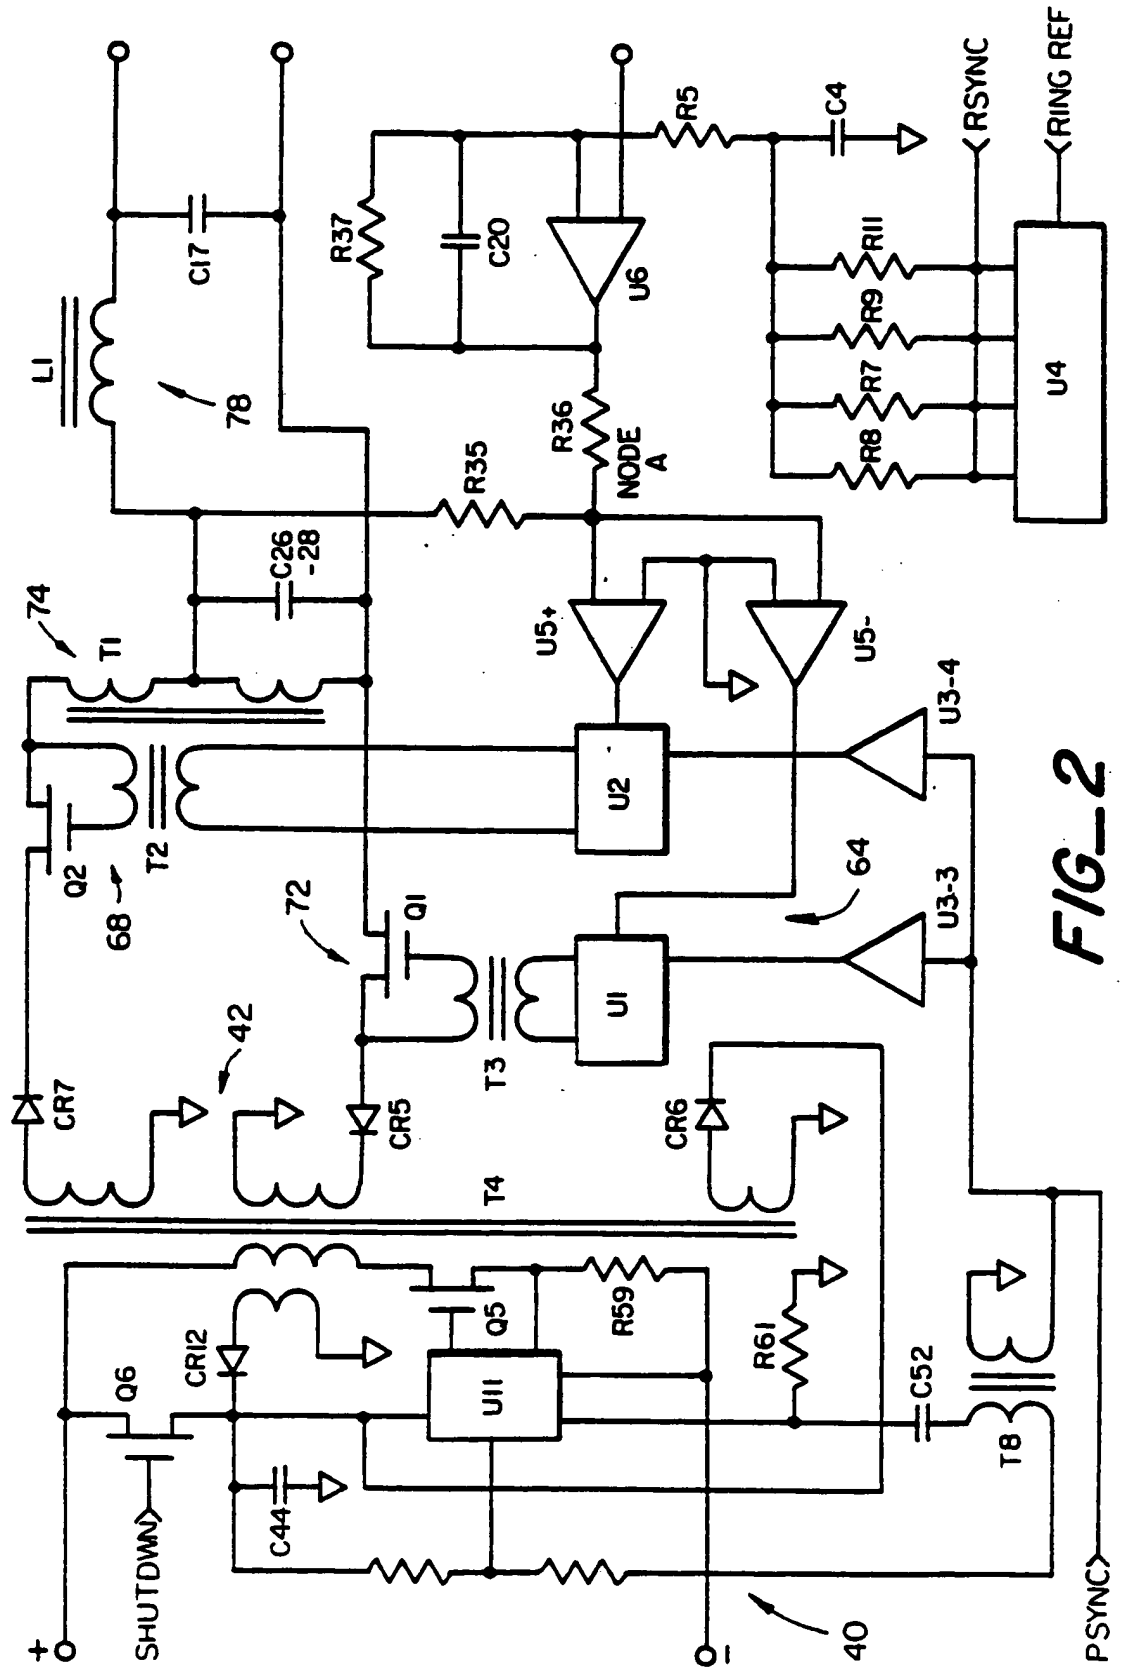


FIG-2

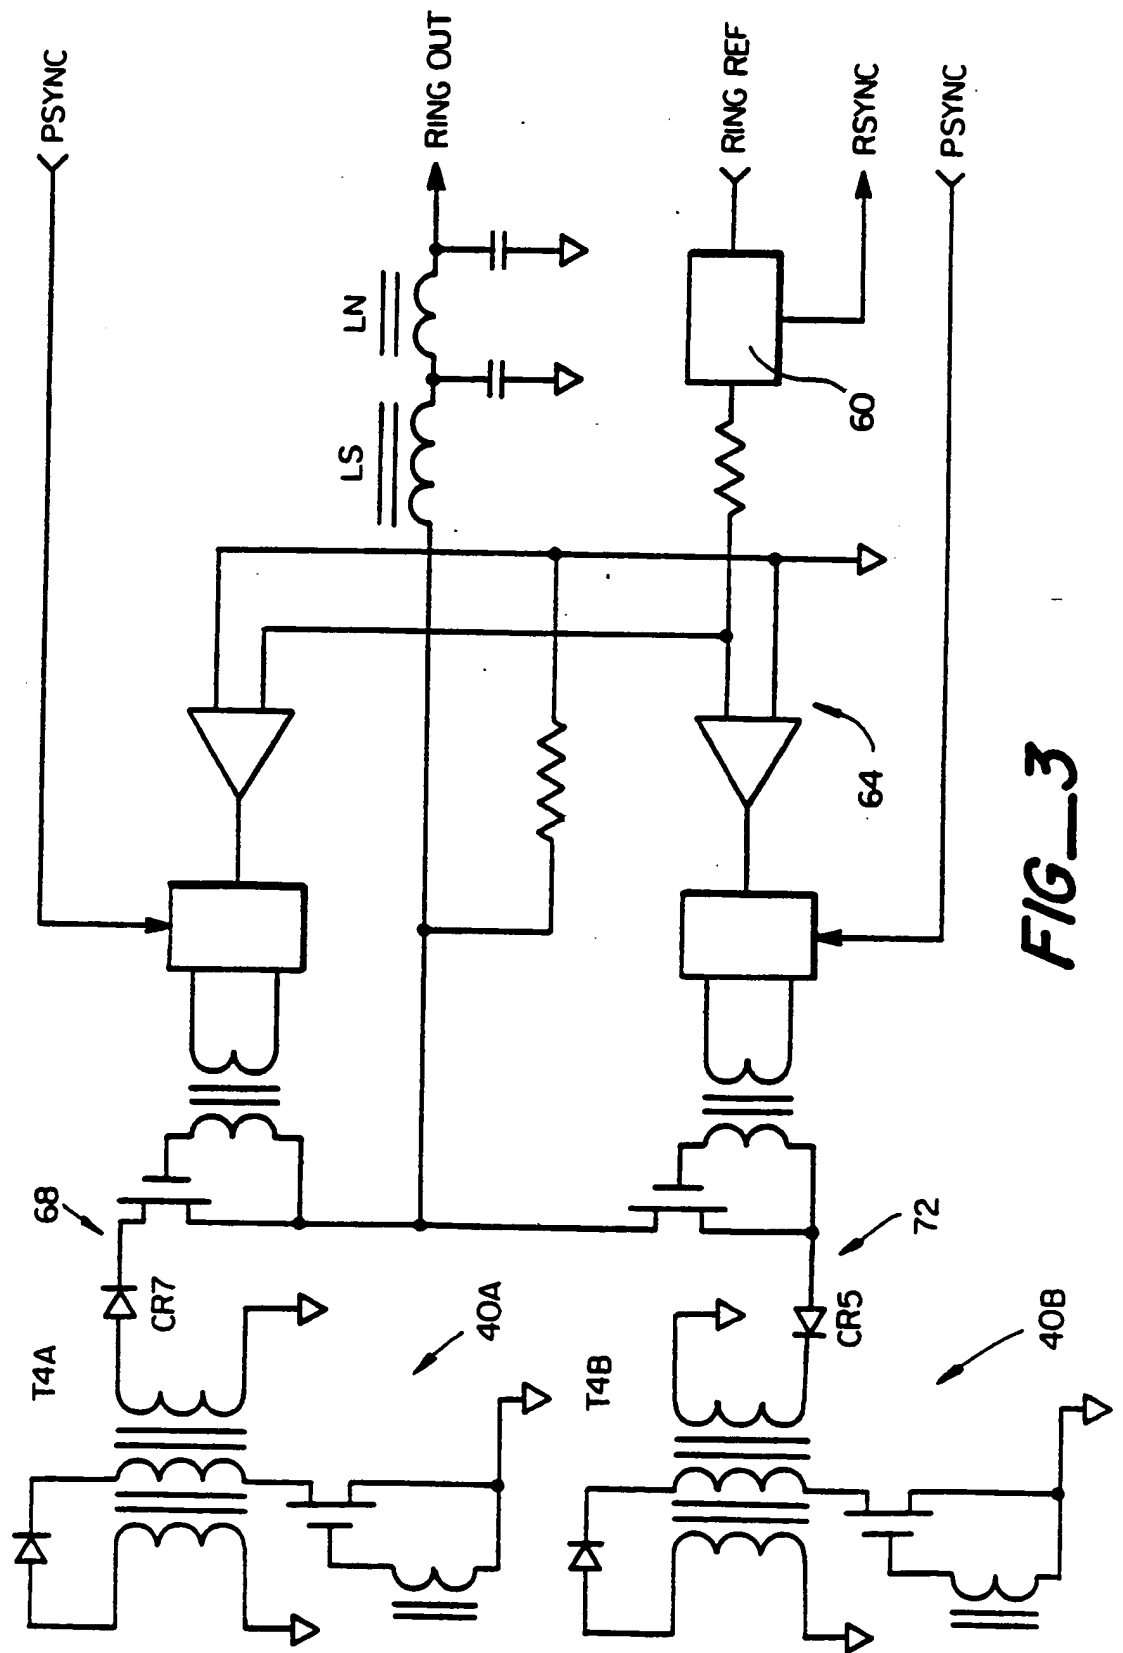
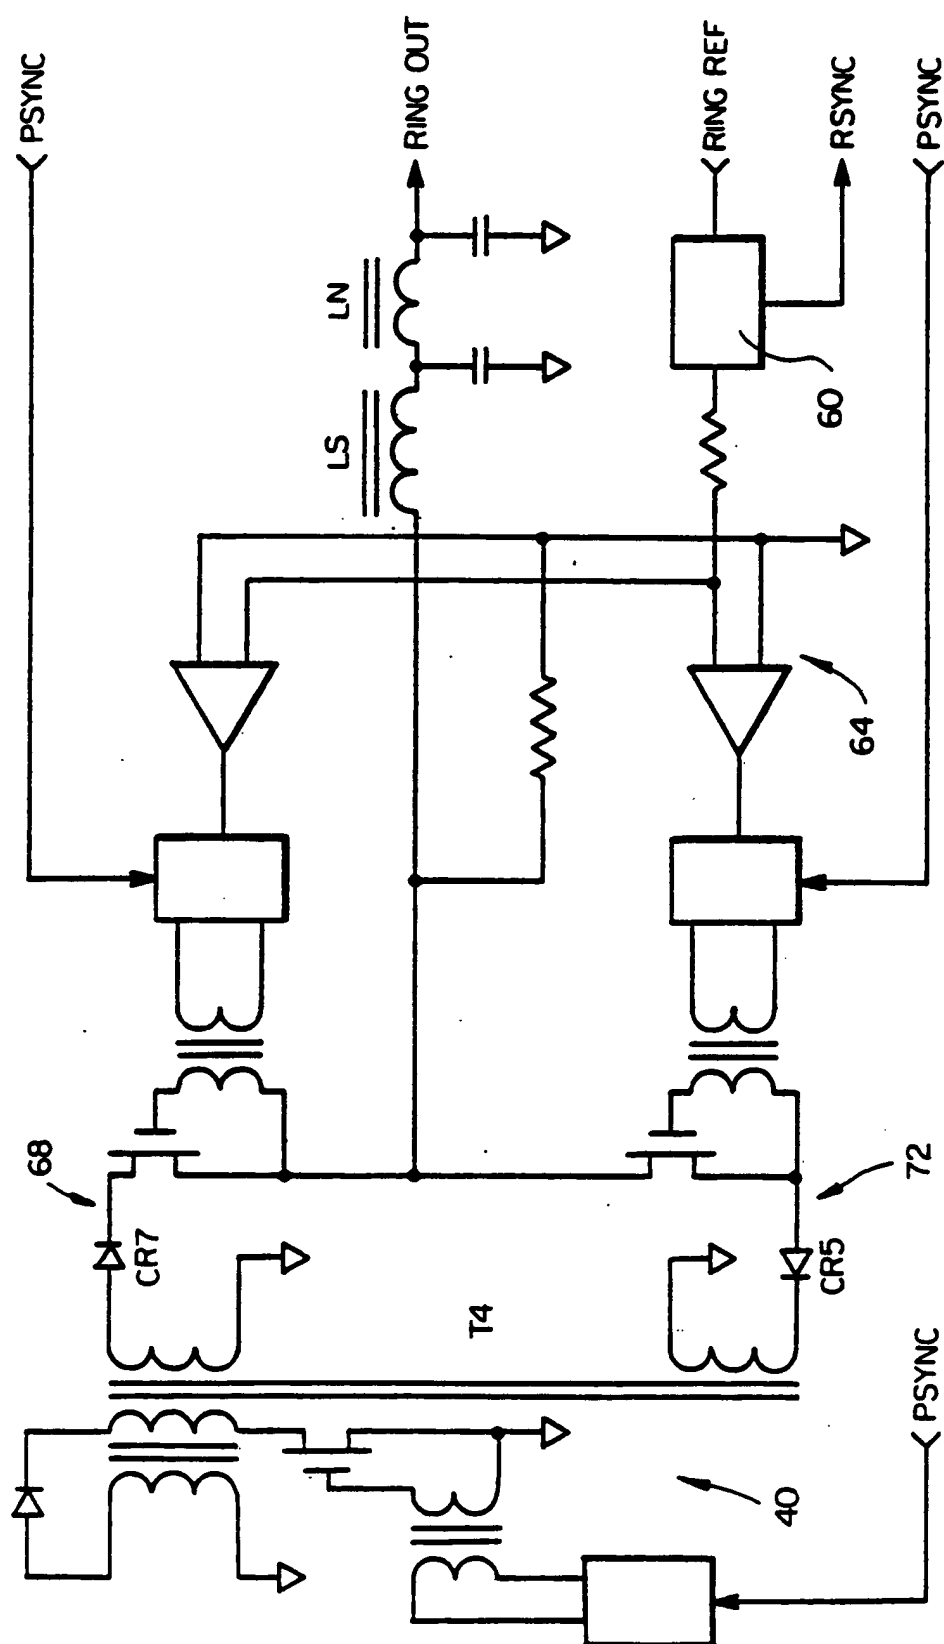
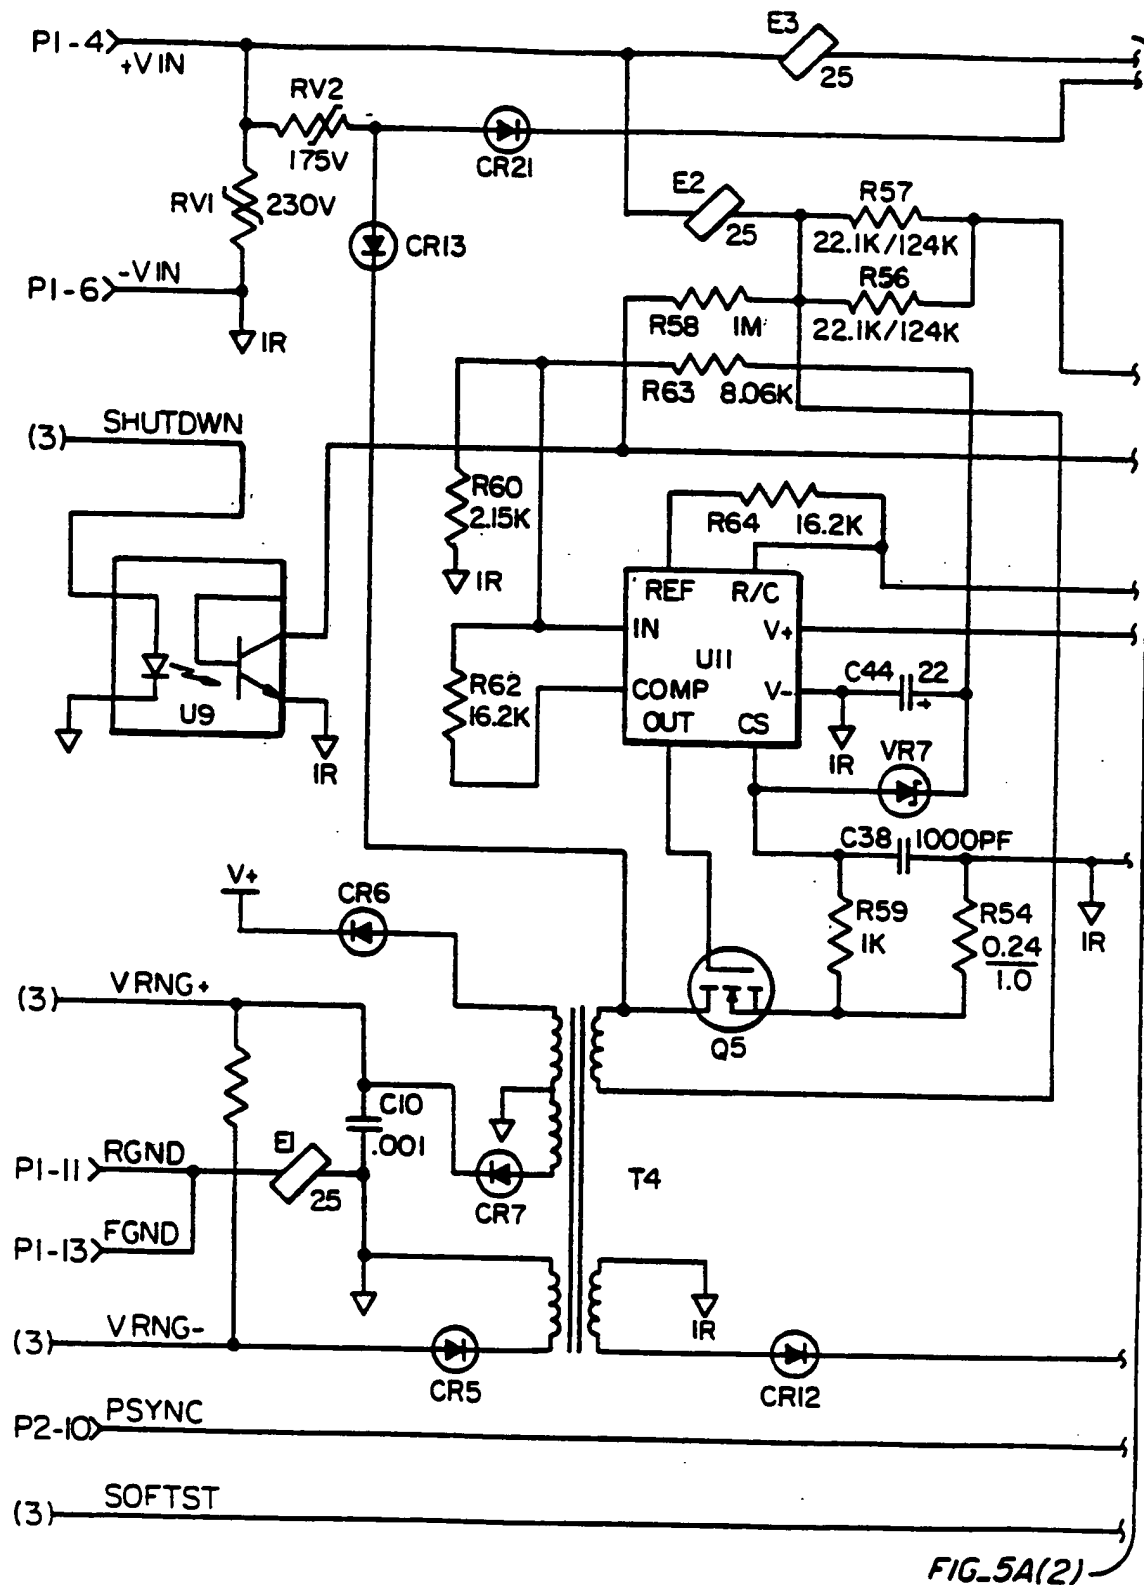



FIG. 3



FIG_4



FIG_5A(1)

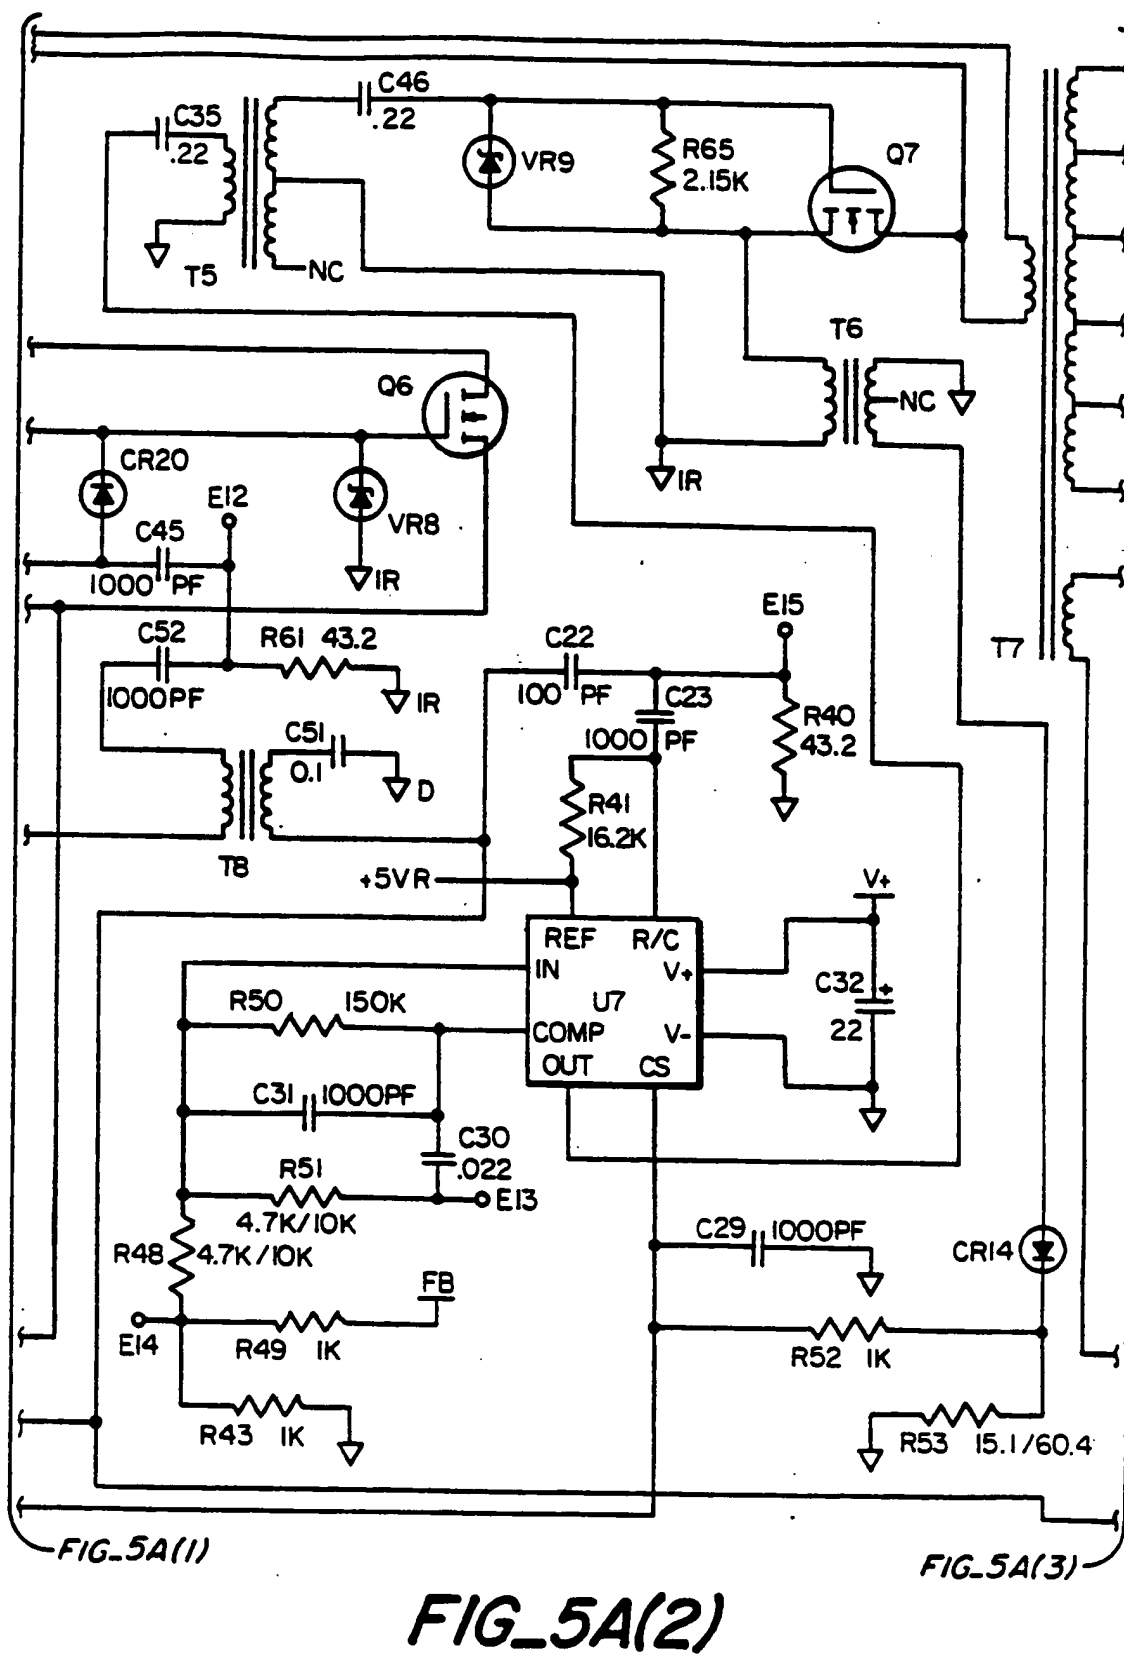




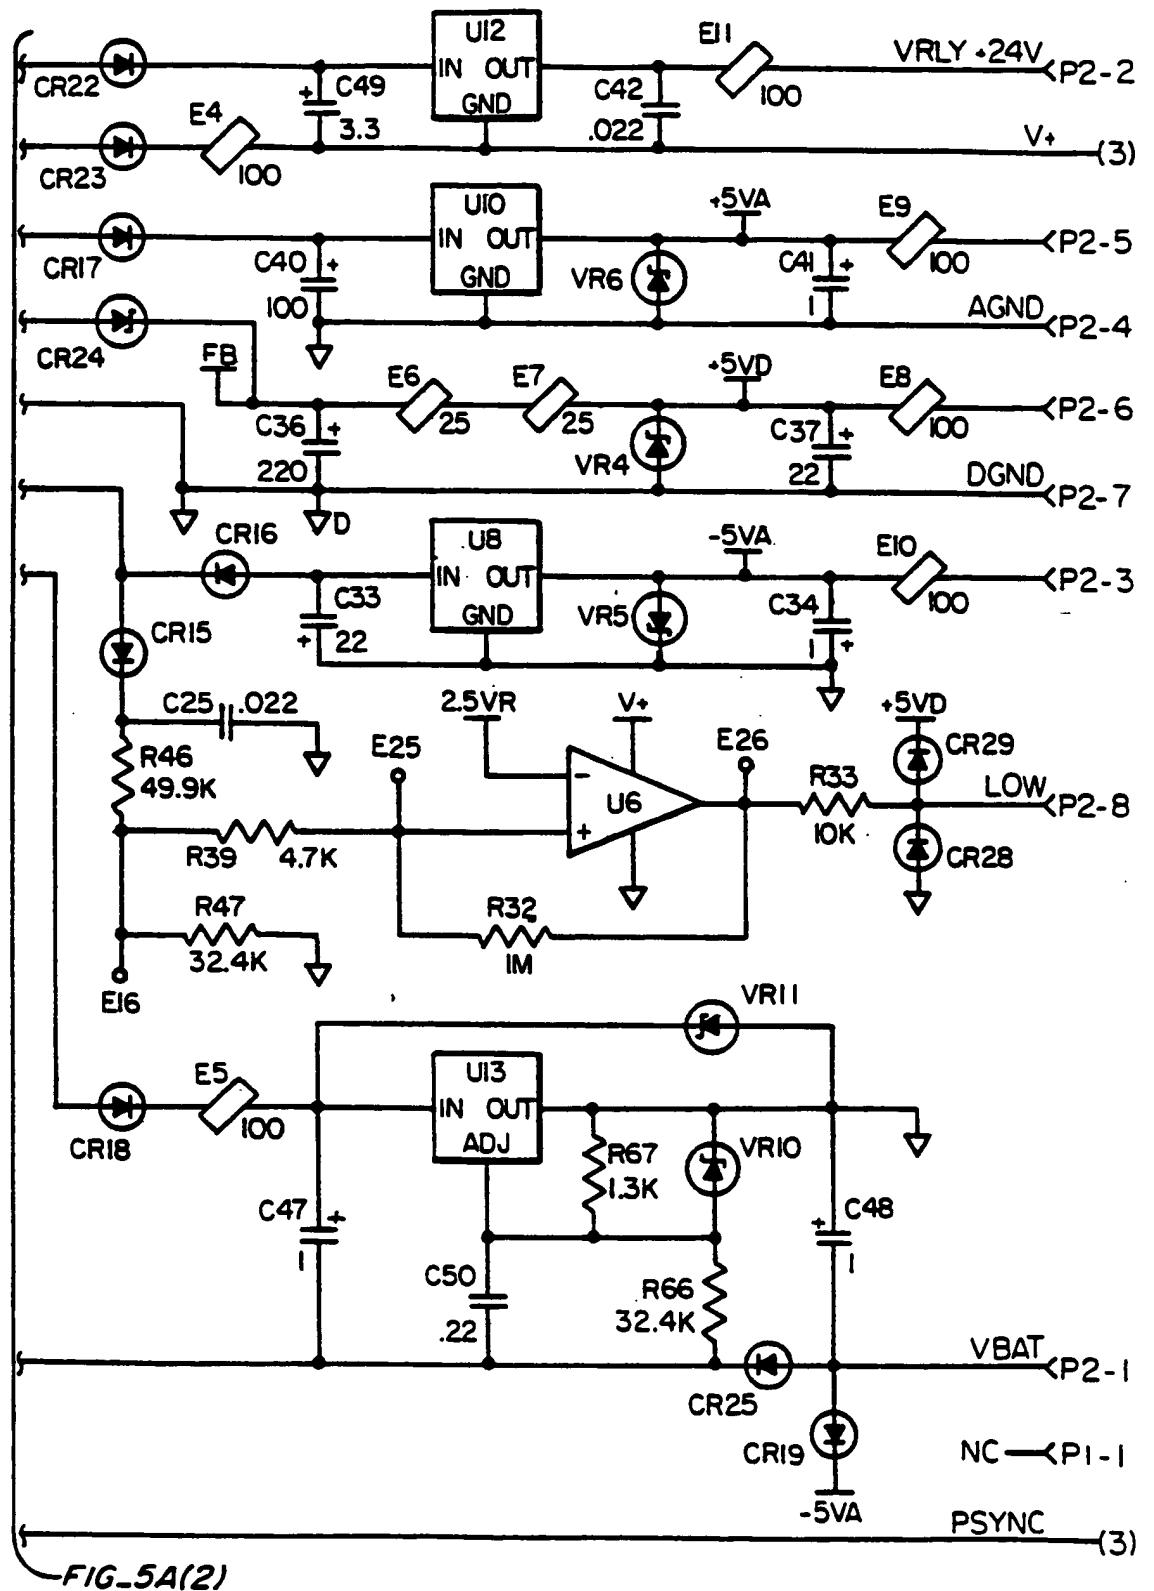


FIG. 5A(3)

**FIG_5B(1)**

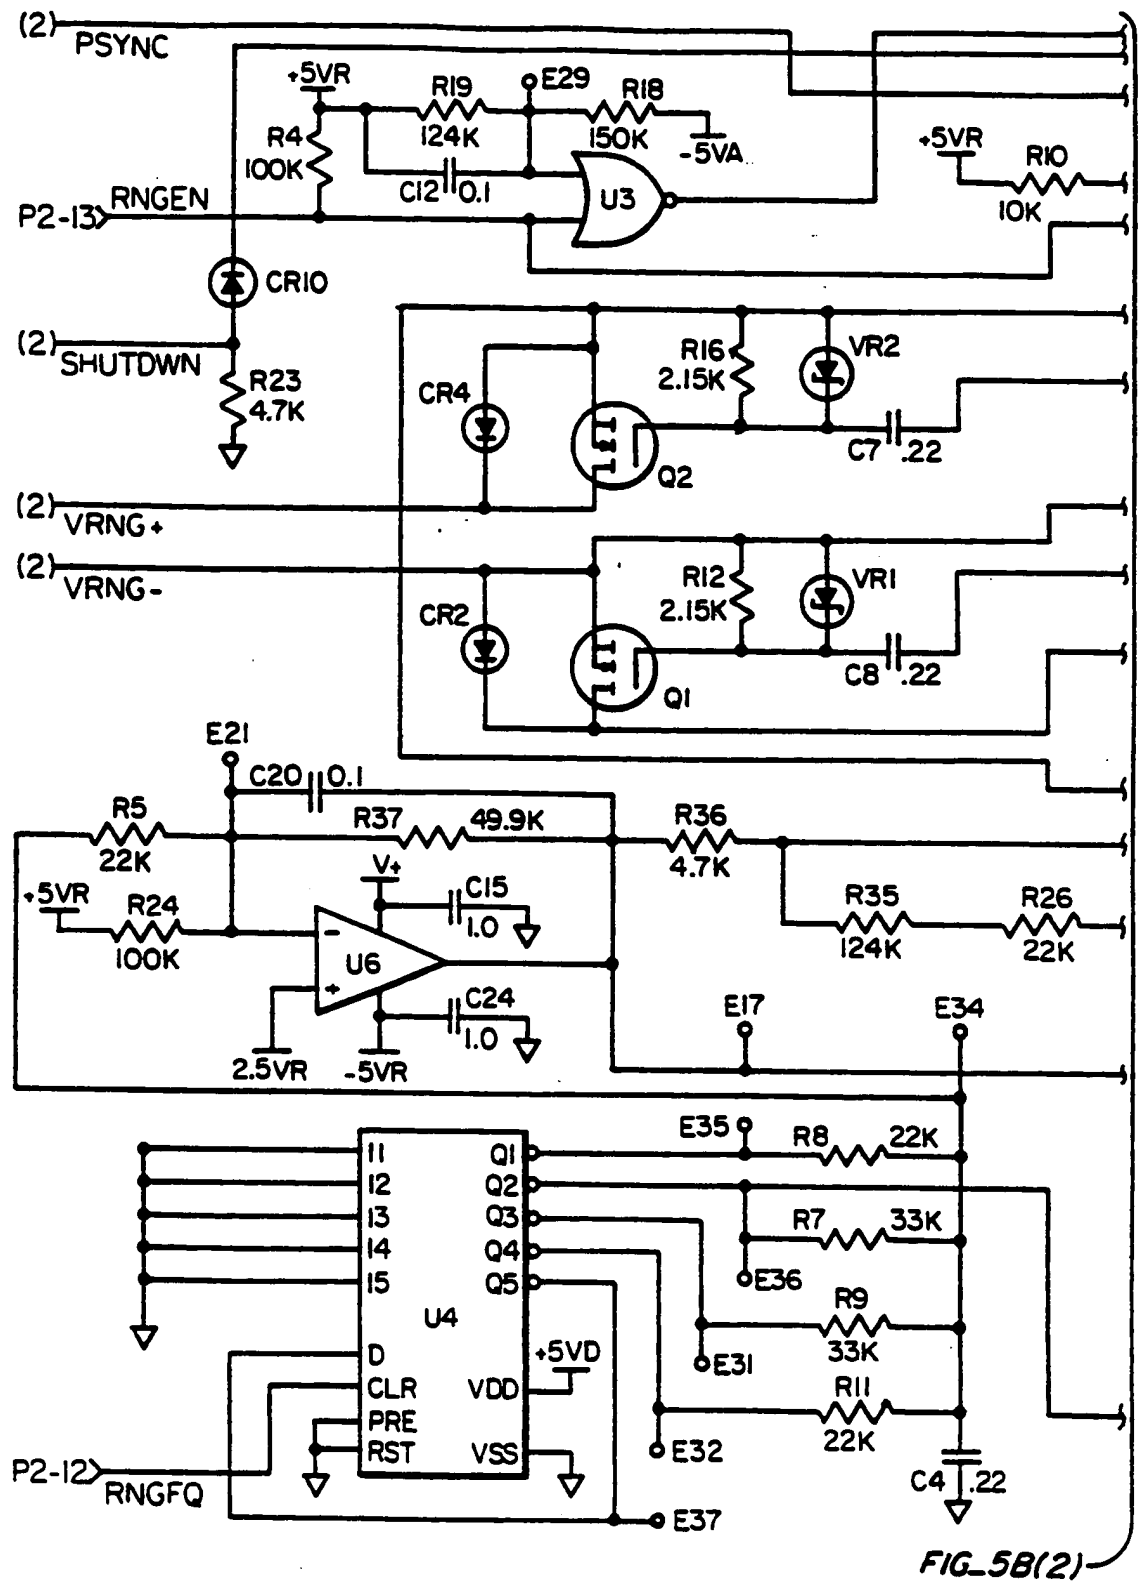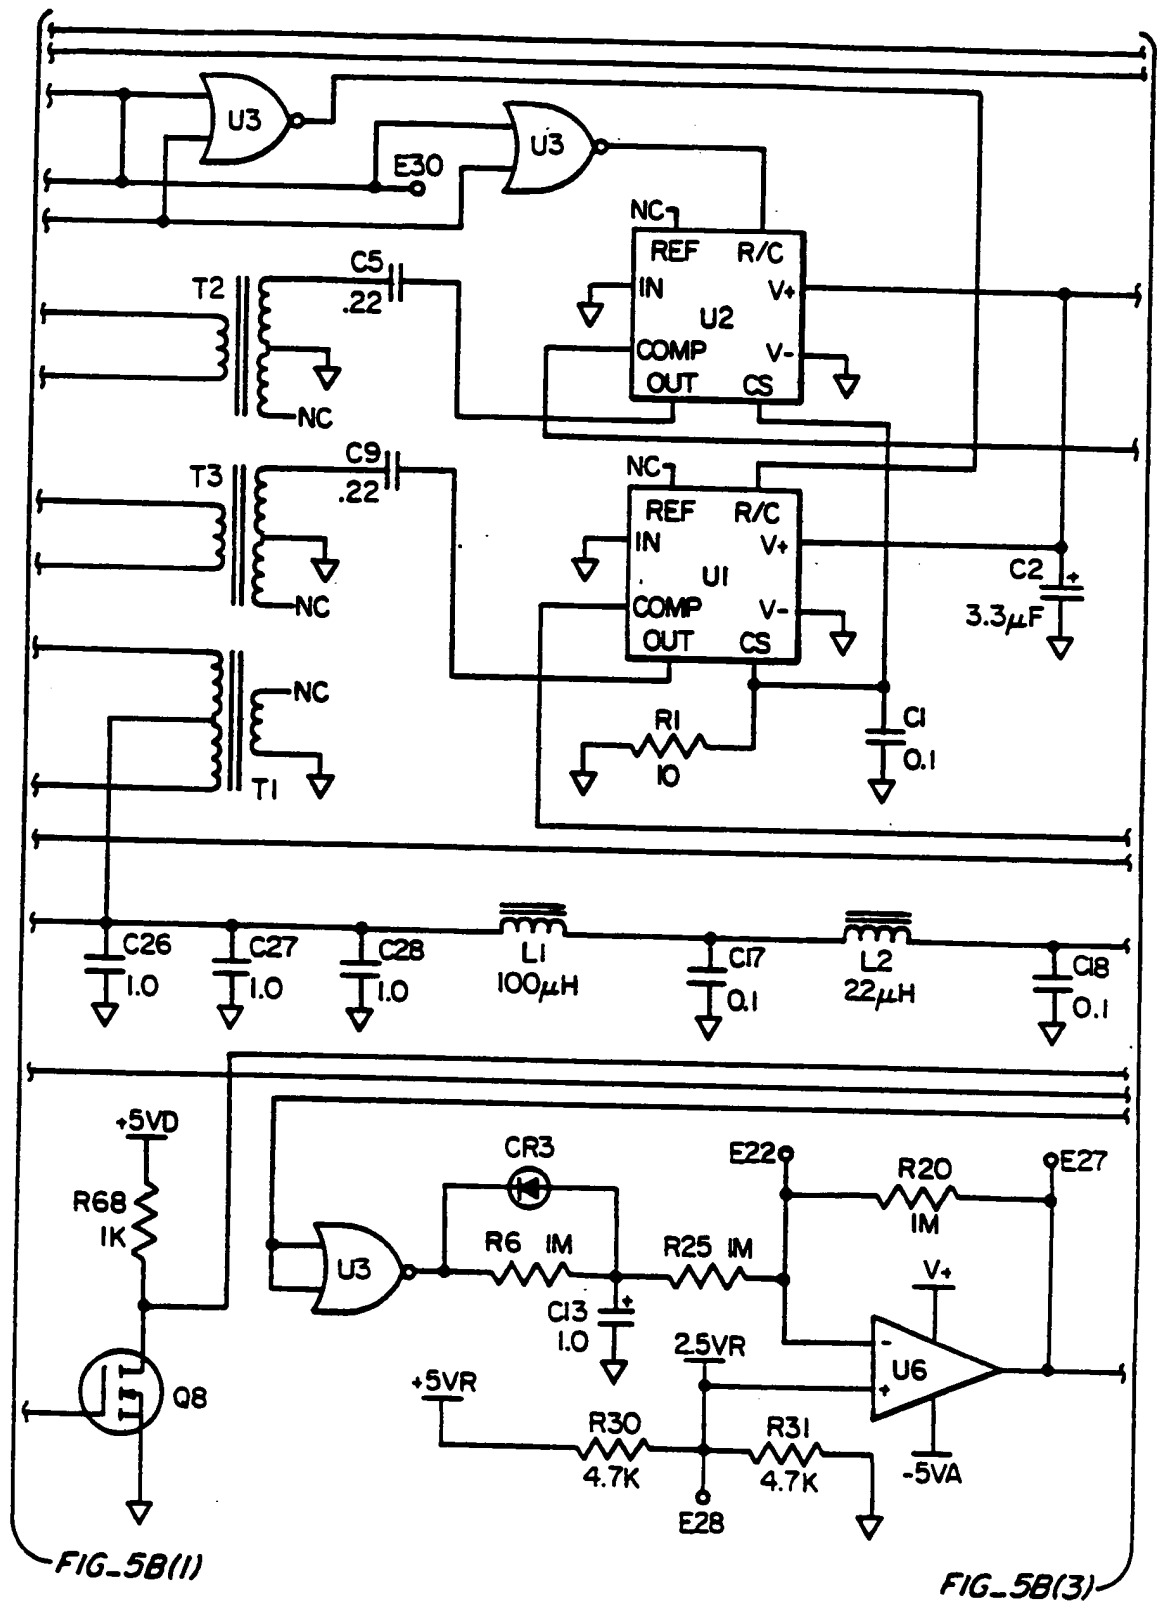

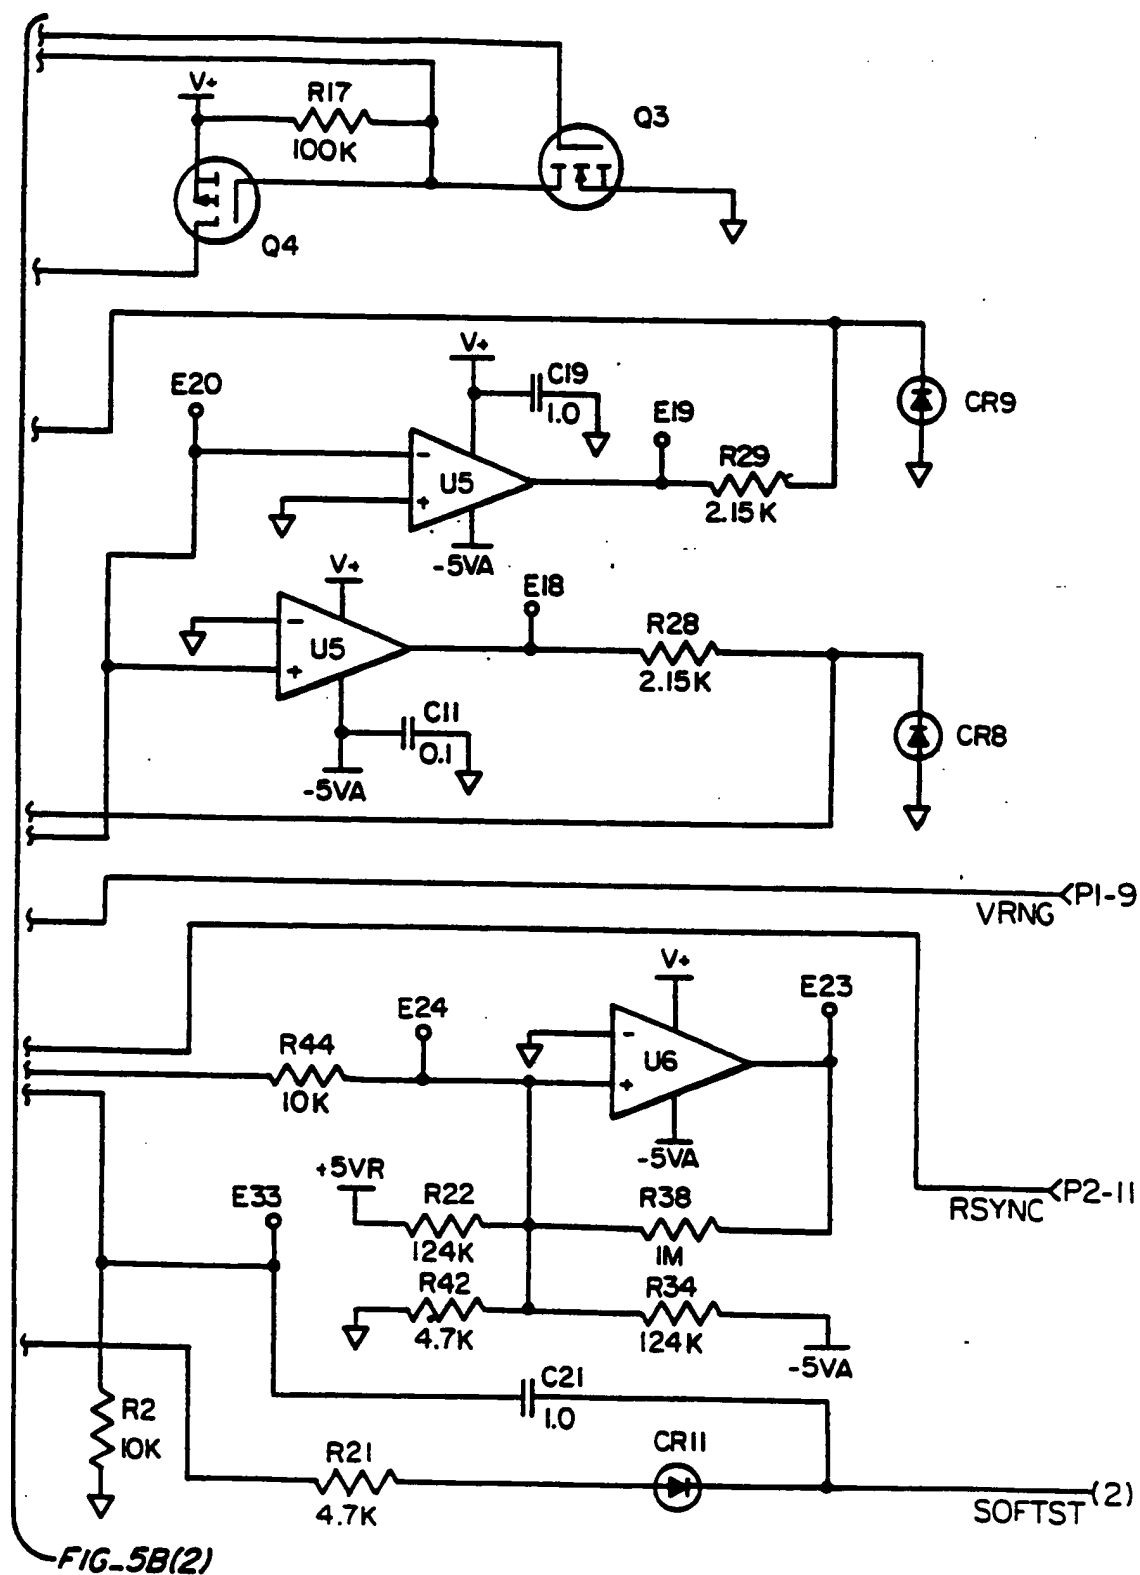

INTERNATIONAL SEARCH REPORT

PCT/US 92/02456

International Application No.

I. CLASSIFICATION F SUBJECT MATTER (If several classification symbols apply, indicate all) ⁶		
According to International Patent Classification (IPC) or to both National Classification and IPC		
Int.C1. 5 H02M7/48; H04M19/00		
II. FIELDS SEARCHED		
Minimum Documentation Searched ⁷		
Classification System	Classification Symbols	
Int.C1. 5	H02M ; H04M	
Documentation Searched other than Minimum Documentation to the Extent that such Documents are included in the Fields Searched ⁸		
III. DOCUMENTS CONSIDERED TO BE RELEVANT⁹		
Category ¹⁰	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³
X	EPE '89 3RD EUROPEAN CONFERENCE ON POWER ELECTRONICS AND APPLICATIONS 9 October 1989, AACHEN pages 1427 - 1431 PRAKASH 'low frequency sinewave inverter using ferrites' see the whole document	6-9, 12
A	INTELEC 12TH INTERNATIONAL TELECOMMUNICATIONS ENERGY CONFERENCE 21 October 1990, ORLANDO pages 35 - 40 PRAKASH 'a novel high frequency pwm push-pull inverter generates sinusoidal output voltage at 50 hz' see pag. 35-36 topology 1	6-12
<p>¹⁰ Special categories of cited documents:</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"A" document member of the same patent family</p>		
IV. CERTIFICATION		
Date of the Actual Completion of the International Search		Date of Mailing of this International Search Report
18 NOVEMBER 1992		25. 11. 92
International Searching Authority		Signature of Authorized Officer
EUR PEAN PATENT OFFICE		GENTILI L. <i>Luigi Gentili</i>

Form PCT/ISA/210 (second sheet) (January 1985)

III. DOCUMENTS CONSIDERED TO BE RELEVANT (CONTINUED FROM THE SECOND SHEET)

Category *	Citation of Document, with indication, where appropriate, of the relevant passages	Relevant to Claim No.
A	<p>REVIEW OF THE ELECTRICAL COMMUNICATION LABORATORIES vol. 22, no. 9-10, September 1974, pages 818 - 826 YAMAMURA 'dex-all power supply' see figure 2</p> <p>-----</p>	1-5

Form PCT/ISA/210 (extra sheet) (January 1983)